


Dräger Automatic Switch Over Valve

Fully automatic switching from external air to SCBA air and from SCBA air to external air. Provides an uninterrupted air supply to the wearer.

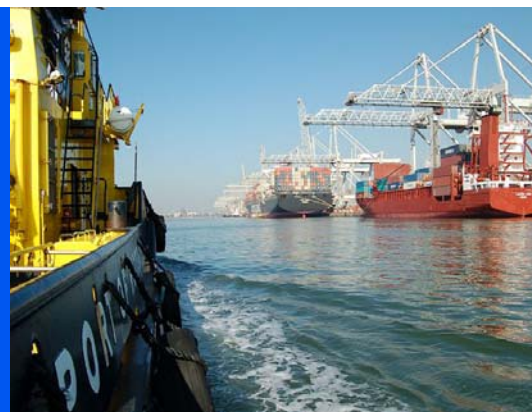

Warning device

A warning device warns that the wearer is now breathing from cylinder compressed air.

Uninterrupted air supply

If the external air supply fails, then the unit will automatically switch to the compressed air breathing apparatus for its supply of air. During the switch over operation the Dräger ASV maintains positive pressure within the facemask at all times.

Low profile and light

Due to its compact design the Dräger PAS ASV can be used easily in confined spaces.

TECHNICAL SPECIFICATIONS

Weight	350 gr
Dimensions	130 x 54 x 32 mm
Supply pressures	Compressed Air Breathing Apparatus - Nominal 7.5 bar External air source -6 to 10 bar
Switching pressures	From external source -4.0 to 5.0 bar To external air source -5.0 to 5.8 bar
Warning device volume	90dba
Operating temperature range	-30°C to +70°C
Approvals	Approved to prEN14593 pt1 and EN139 For use with Compressed Air Breathing Apparatus approved to EN137 and EN402



Dräger Automatic Switch Over Valve
Uninterrupted air supply